SIEMENS

Product data sheet 3RH1921-1HA22



AUXILIARY SWITCH BLOCK, 22 (2NO+2NC), DIN EN50012, 4-POLE, SCREW CONNECTION, FOR MOTOR CONTACTORS, SIZE S0...S3

| General technical data: | | |
|---|----|--|
| product brand name | | SIRIUS |
| Acceptability for application | | Contactor relay and power contactor |
| Protection class IP / on the front | | IP20 |
| Ambient temperature | | |
| during storage | °C | -55 +80 |
| during operating | °C | -25 +60 |
| Mechanical operating cycles as operating time | | |
| • typical | | 10,000,000 |
| Electrical operating cycles as operating time / at AC-15 / at 230 V | | |
| • typical | | 200,000 |
| Contact reliability | | one incorrect switching operation of 100 million switching operations (17 V, 5 mA) |
| Contact reliability / of the auxiliary contacts | | 1 faulty switching per 100 million (17 V, 1 mA) |
| Insulation voltage / with degree of pollution 3 | | |
| • rated value | V | 690 |
| Impulse voltage resistance | | |
| • rated value | kV | 6 |

Auxiliary circuit:

| Number of NC contacts / for auxiliary contacts | | |
|--|---|------|
| • instantaneous switching | | 2 |
| Number of NO contacts / for auxiliary contacts | | |
| • instantaneous switching | | 2 |
| Operating current / of the auxiliary contacts / at AC-12 | | |
| • at 24 V | А | 10 |
| • at 230 V | А | 10 |
| • maximum | Α | 10 |
| Operating current | | |
| of the auxiliary contacts | | |
| • at AC-14 | | |
| • at 125 V | Α | 6 |
| • at 250 V | Α | 6 |
| • at AC-15 | | |
| • at 24 V | А | 6 |
| • at 230 V | Α | 6 |
| • at 400 V | А | 3 |
| • at AC-15 / at 690 V | А | 1 |
| Operating current | | |
| • with 2 current paths in series / at DC-12 | | |
| • at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 10 |
| • at 110 V / rated value | Α | 4 |
| • at 220 V / rated value | Α | 2 |
| • at 440 V / rated value | Α | 1.3 |
| • at 600 V / rated value | Α | 0.65 |
| • with 3 current paths in series / at DC-12 | | |
| • at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 10 |
| • at 110 V / rated value | Α | 10 |
| • at 220 V / rated value | Α | 3.6 |
| • at 440 V / rated value | Α | 2.5 |
| • at 600 V / rated value | Α | 1.8 |
| Operating current | | |
| of the auxiliary contacts / at DC-13 | | |
| • at 24 V | Α | 10 |
| • at 60 V | Α | 2 |
| • at 110 V | Α | 1 |
| • at 220 V | А | 0.3 |
| • with 2 current paths in series / at DC-13 | | |

| at 24 V / rated value | Α | 10 |
|---|---|------|
| • at 60 V / rated value | Α | 3.5 |
| • at 110 V / rated value | Α | 1.3 |
| • at 220 V / rated value | Α | 0.9 |
| • at 440 V / rated value | Α | 0.2 |
| • at 600 V / rated value | Α | 0.1 |
| • with 3 current paths in series / at DC-13 | | |
| at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 4.7 |
| • at 110 V / rated value | Α | 3 |
| • at 220 V / rated value | Α | 1.2 |
| • at 440 V / rated value | Α | 0.5 |
| • at 600 V / rated value | Α | 0.26 |

| Installation/ mounting/ dimensions: | | |
|-------------------------------------|----|------------------|
| Mounting type | | snap-on mounting |
| Width | mm | 44 |
| Height | mm | 38 |
| Depth | mm | 51 |

| Connections/ terminals: | |
|---|-------------------------------------|
| Design of the electrical connection | |
| for auxiliary and control current circuit | screw-type terminals |
| Type of the connectable conductor cross-section | |
| for auxiliary contacts | |
| finely stranded | |
| with conductor end processing | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| • for AWG conductors / for auxiliary contacts | 2x (20 16), 2x (18 14) |

| Safety: | |
|---|-----------|
| Product function / mirror contact to IEC 60947-4-1 | Yes |
| • comment | with 3RT1 |
| Product function / positively driven operation to IEC 60947-5-1 | No |

Certificates/ approvals:

General Product Approval

Functional Safety / Safety of Machinery

Declaration of Conformity









Type Examination



Test Certificates

Shipping Approval

other

Special Test Certificate







Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RH1921-1HA22/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH1921-1HA22



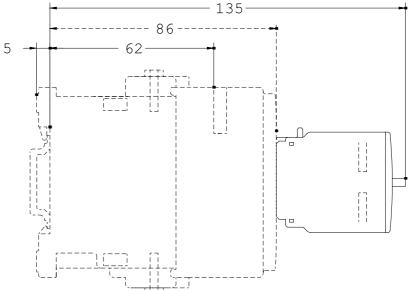

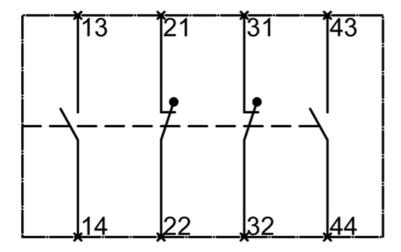

last change: Apr 21, 2014